




FRONT

IF DISHWASHER INSTALLED FILLERS NEED TO BE 5" BTWN DW AND CORNER AND 4" BTWN CORNER AND RANGE.

STAIRS DESIGNED TO 8 1/4" RISE MAX., AND 9" TREAD MIN W/ 1 1/8" NOSING

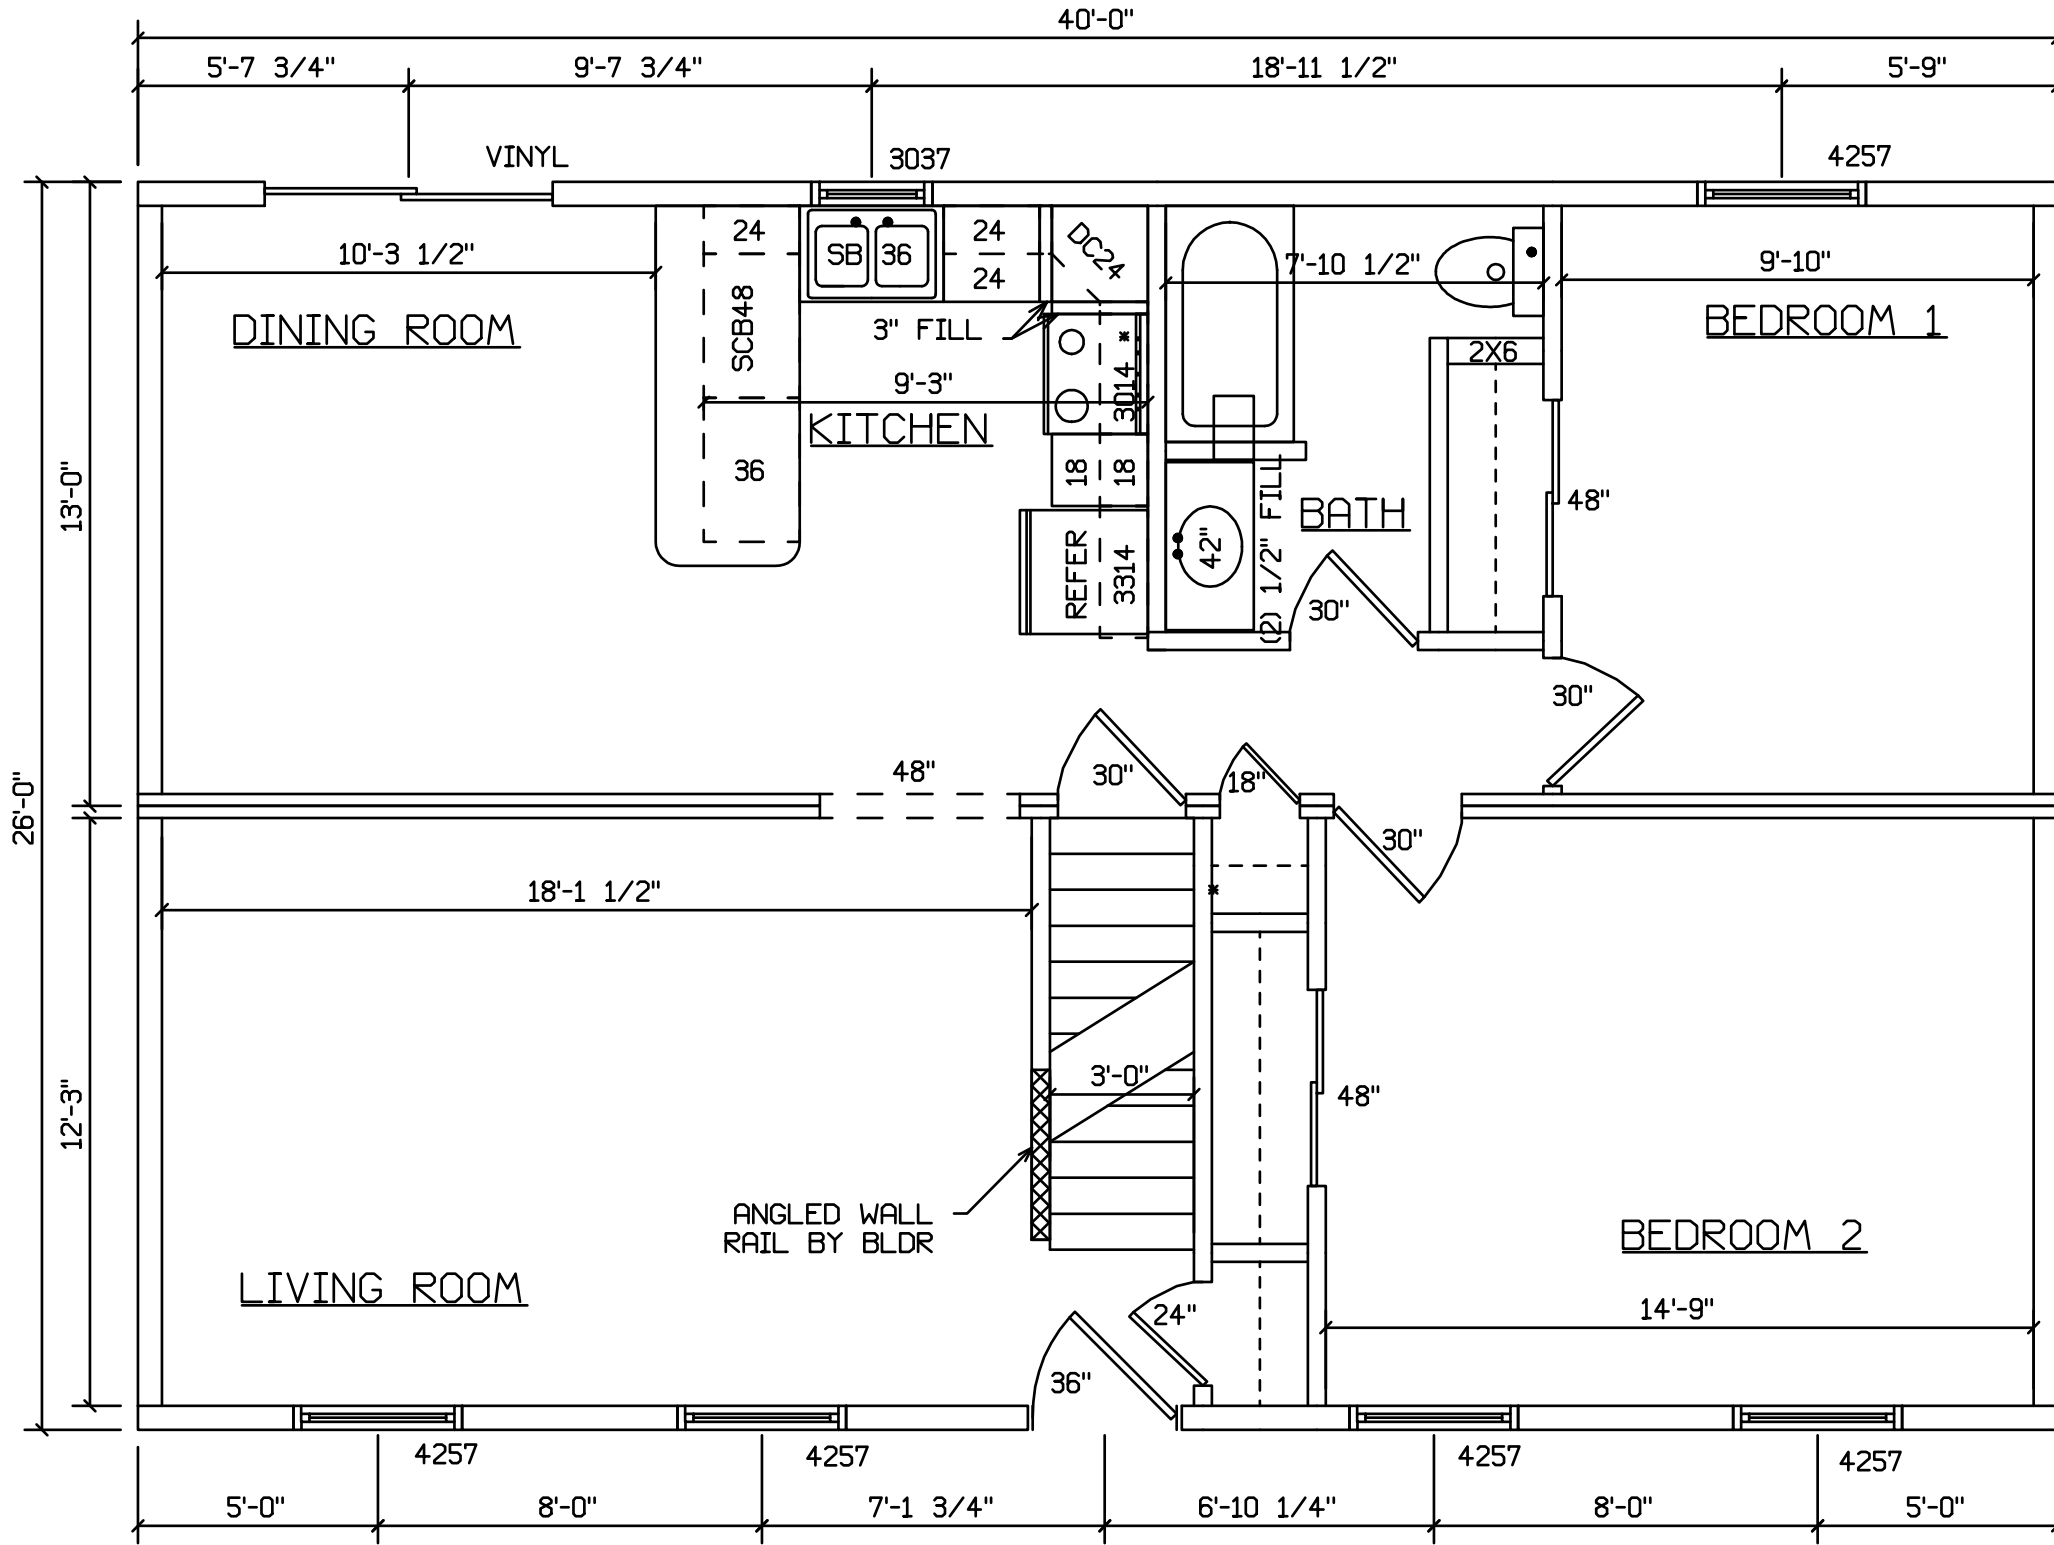

IF DISHWASHER INSTALLED FILLERS NEED TO BE 5" BTWN DW AND CORNER AND 4" BTWN CORNER AND RANGE.

STAIRS DESIGNED TO 8 1/4" RISE MAX., AND 9" TREAD MIN W/ 1 1/8" NOSING

CAPE COD #231  
WITH OPTIONAL 60" DORMERS



FRONT

IF DISHWASHER INSTALLED FILLERS NEED TO  
BE 5" BTWN DW AND CORNER AND 4" BTWN  
CORNER AND RANGE.

STAIRS DESIGNED TO 8 1/4" RISE  
MAX., AND 9" TREAD MIN W/ 1 1/8" NOSING